
Ilex D Programming Q-Card

Scan Here for Operator Manual
Scroll to ilex D

WARNING!
Read operator manual prior to use

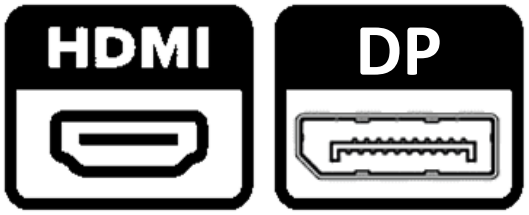

HDMI vs DP cable, shown.


Power On Monitor:

Monitor is equipped with power cord. Plug power cord into hospital grade outlet. Press “ON/OFF” switch on rear bottom of monitor. Lights will display on front of monitor.
Press power button on menu buttons if required.

Plug in video sources to be connected to monitor

Cables are labeled as shown in table below
Route desired cables to the respective device per table


Video Source	Input Port	Label Color on Cable
C-Arm Live	DVI1 or DP1(if applicable)	Green
C-Arm Ref	DVI3 or DP2(if applicable)	Black
IVUS/Hemo/Vitals/etc	DVI2	Red
IVUS/Hemo/Vitals/etc	DVI4	Red-Red (2 Strips)

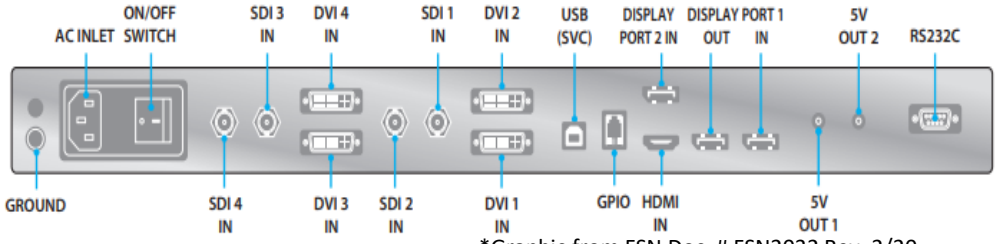

*Graphic from FSN Doc. # FSN2032 Rev. 2/20

Select Layout or “PIP Mode”

To change layouts press PIP button on remote
Each press of the PIP button will cycle to the next layout
As shown, Single, PIP, PBP, Triple, Quad

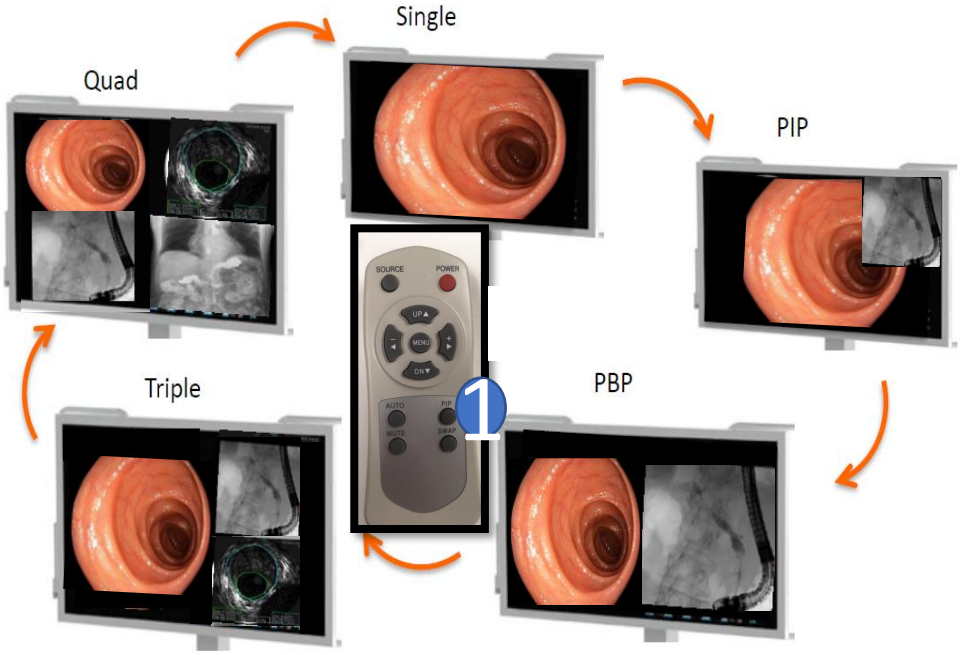

Typical Layouts



Ilex D Programming Q-Card


Changing Sources

1. Press Source (Green Window will appear)
2. Press Up/Down to select desired input
3. "+" (right arrow) to enter selected input


Note: In some cases SDI1 will show up, to go back to DVI1 navigate to SDI1 then press "-" to switch back to DVI1 then press "+" to accept change. This applies to all 4 DVI/SDI channels.

idi
imagediagnostics.com




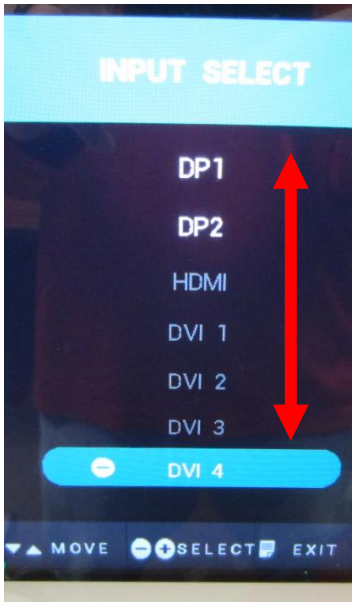

Active window will always be framed by a green boundary line, when source button is pressed

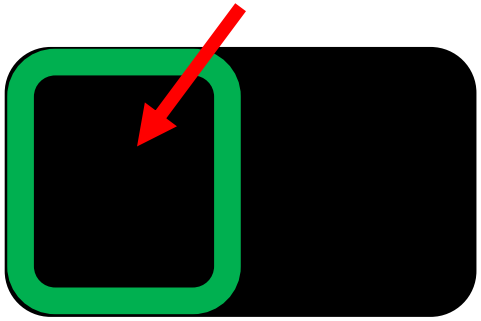


Press Source again, to switch to different active window

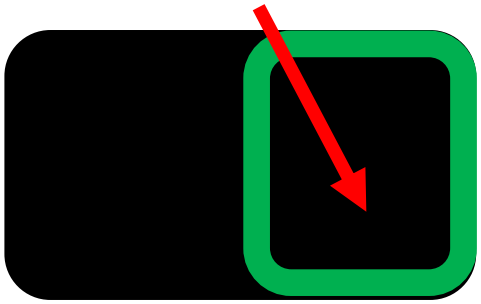


Adjusting Height of the Monitor:

The monitor height is adjustable.

To adjust the height loosen, turn counterclockwise, the brake mechanism on the rear of the column. Lift up or push down on the rear column handles. Then tighten brake in place once desired height is reached.

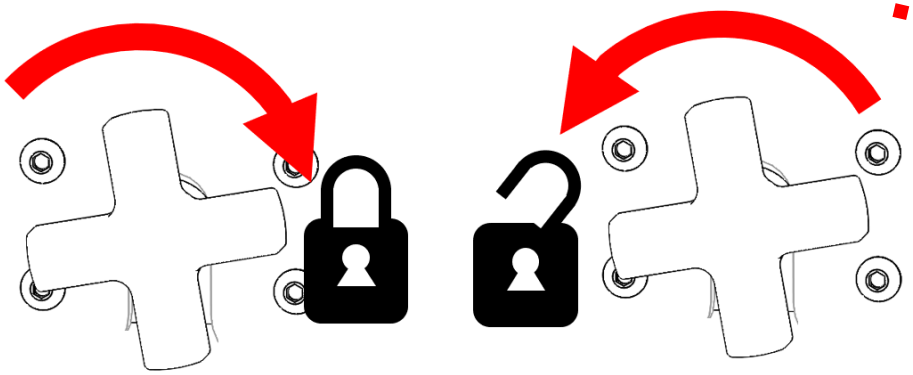

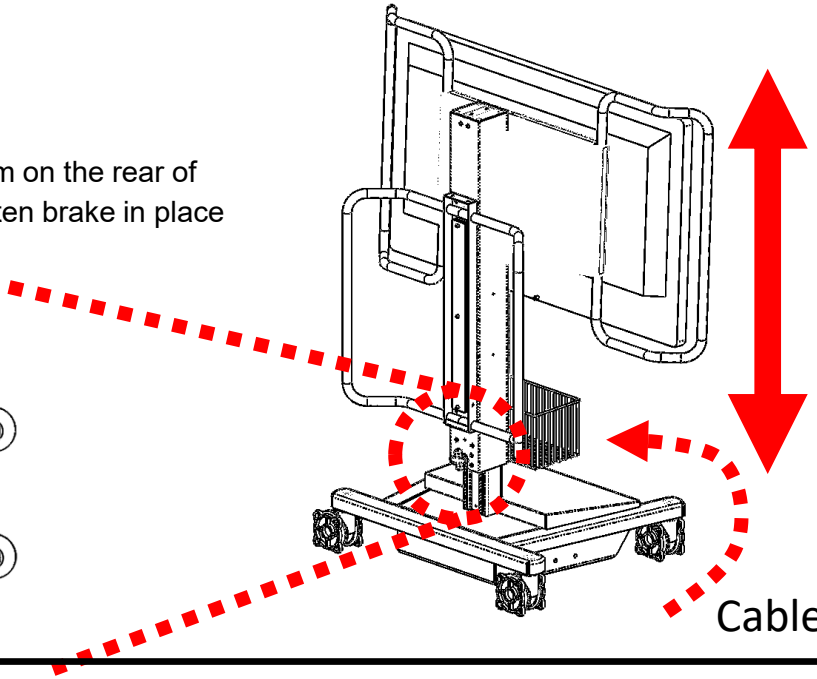

Cable Storage