Ilex Q-Card

WARNING!
Read operator manual prior to use



Scan Here for
Operator Manual
Then Scroll to ilex


idi
imagediagnostics.com

Power On Device

ilex unit is equipped with power cord. Plug power cord into hospital grade outlet. Press Green "ON/OFF" switch on the left side of the top shelf.


Plug in video sources to be connected to monitor

Each video channel has a designated DVI input on the monitor. The device connected first in each channel will show on the monitor. DVI 3 utilizes the router switch. To switch between multiple inputs, see back side of Q-card.

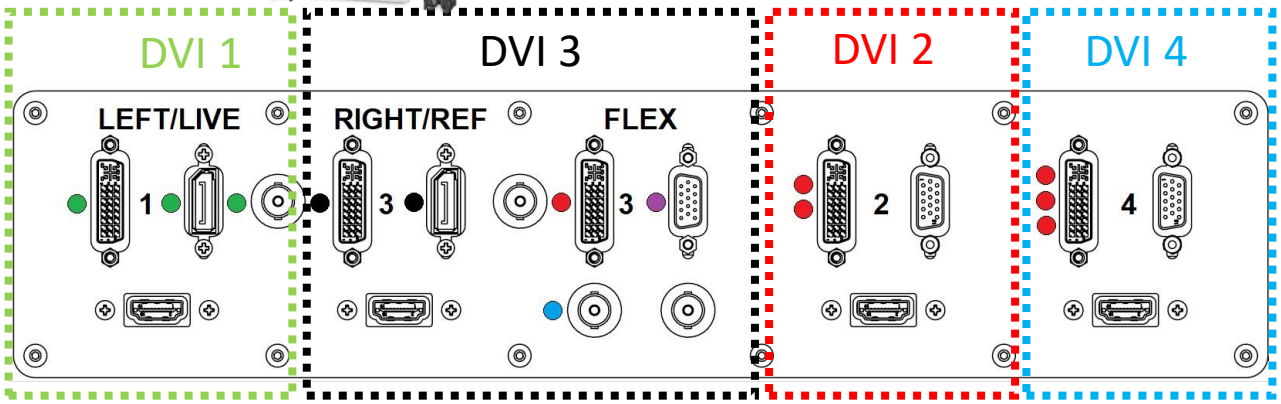


Select Layout or "PIP Mode"

To change layouts, press PIP button on remote. Each press of the PIP button will cycle to the next layout. As shown: Single, Picture-in-Picture (PIP), Picture-by-Picture (PBP), Triple, and Quad.

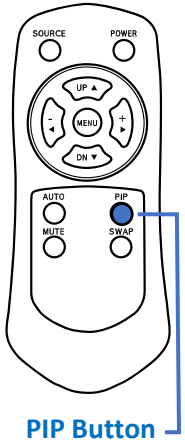


Single	PIP	PBP	Triple	Quad
DVI1 or DVI 2 or DVI3 or DVI 4 or DP1 or DP2	DVI3/DP2 / DVI1/DP1	DVI1/DP1 | DVI3/DP2	DVI1/DP1 | DVI3/DP2 / DVI2	DVI1/DP1 | DVI2 / DVI3/DP2 | DVI4

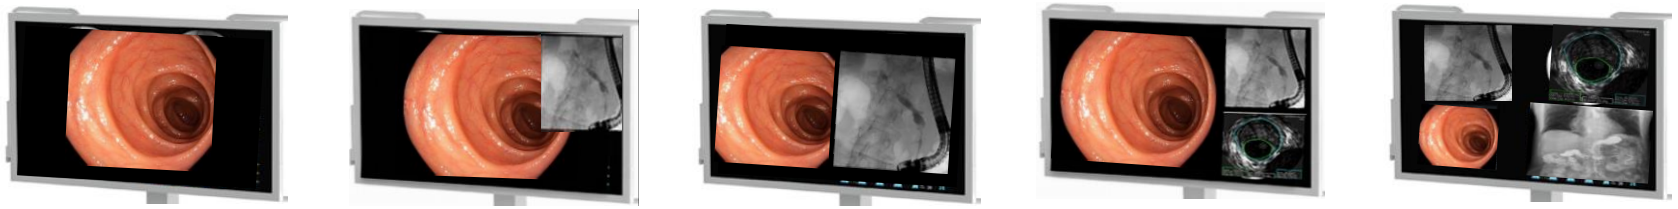

Ilex Q-Card

Changing Sources

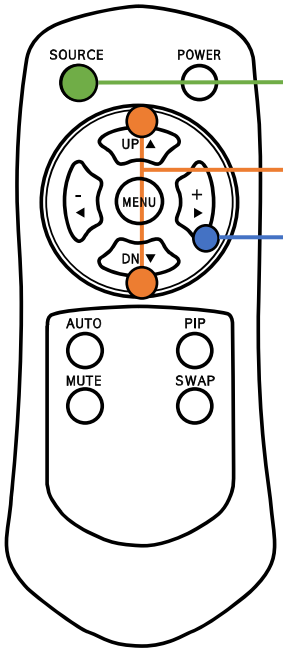


1 Press Source button to open Input Select Window

2 Press Up/Down to select desired input


3 Press "+" Button (also right arrow) to enter selected input



Active window will always be framed by a green boundary line, when source button is pressed




Press Source button again to switch to different active window



Adjusting Height of the Monitor

The monitor height is adjustable.

To adjust the height, press the up or down button on the right-hand side of the top shelf.

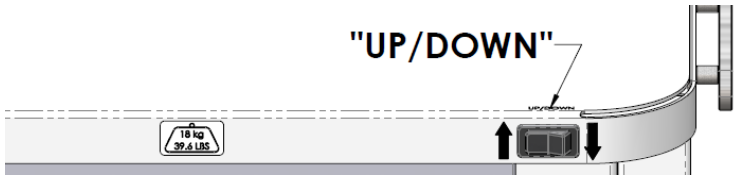

Router Switch Adjustments (Channel 3/DVI 3)

For channel 3, a switching router is utilized underneath the top shelf. Verify power is on when green LED light and the screen is lit up blue. Press power button if required.

Input: Pressing input button will change the desired input (C-arm Ref, Flex, S-Video, SDI).

Output: Pressing output will change the desired output resolution (1080p60, 1080p30,720p30, SXGA).

