

Motorized elevation, trendelenburg tilt and 4-way tabletop movement



Lightweight aluminum boarding extension. An optional carbon fiber imaging extension is available.



Trendelenburg: ±12°



Longitudinal tabletop travel: 13.75"



Transverse travel: ± 3.5". 7" total

Standard Features



Metal-free perineal end of table: Unobstructed imaging to the edge of the tabletop.



Onboard dedicated

Removable lead-vinyl x-ray



Wireless footswitch and pendant hand control



Collapsible drain bag hoop



Quick-release armboard



Specifications

Image Diagnostics

Since 1986. IDI has been

a manufacturer of

innovative products for

surgical, interventional

and diagnostic imaging.

Our product focus is in

electro-mechanical

solutions for fluoroscopic and digital radiographic

applications.

IDI is committed to

superior product design.

value and customer support in everything

we do.

Components, and Features:

- Imaging area, main tabletop: 23" W x 29" L (58cm x 73cm)
- Metal-free perineal end of tabletop for unobstructed imaging access
- Imaging area, with optional carbon fiber tabletop extension: 23" W x 64" L (58cm x 162 cm)
- Lightweight aluminum boarding extension: 28"W x 32"L (71cm x 81 cm)
- Includes 2" (5 cm) thick memory foam table pads
- Onboard footswitch storage
- Standard US side-rails for accessory attachments on main tabletop
- Locking rear swivel casters, 6" (15.2cm)

Table dimensions and movement:

- Low X-ray attenuation carbon fiber tabletop 28"W x 46.5"L (71cm x 118 cm)
- Motorized motions via wireless foot switch and hand control pendant
- Elevation: 29.25"- 41" (74cm 104 cm)
- Trendelenburg Tilt: ± 12°
- Longitudinal tabletop travel: 13.75" (35cm)
- Transverse tabletop travel: ± 3.5", 7" total (± 8.9 cm, 17.8cm total)

Table patient weight capacity:

- With patient upper body on main tabletop: 550 lbs.(249 kg)
- With patient upper body on optional radiolucent extension: 350 lbs. (158kg)
- Boarding extension only (A100-3543): 75 lbs. (34kg)
- Optional radiolucent imaging extension only (A100-1400): 200 lbs. (90kg)

Electrical:

• 120 Vac, 60Hz operation or 230 VAC, 50Hz. <10 amp at 120VAC

Table & Extension Weight:

- Table: ~724 lbs. (~330kg)
- Aluminum Tabletop Extension: 15 lbs. (6.8kg)

Accessories included:

- Tabletop Pad, 2" thick
- Aluminum boarding extension, with 2" thick pad
- Wireless hand control pendant & footswitch control
- Removable drain bag support hoop
- Disposable drain bag and hose, box of 20
- Removable radiation shield flap for perineal end of table
- Patient restraint straps (2)
- Armboard, rail mounted, with pad and strap
- Disposable covers for footswitch, box of 50

Optional Accessories (not included in standard accessory package):

- Boot-style "ComfortFin" Stirrups with pneumatic-assist adjustment.
- Carbon Fiber Imaging Extension

Note: Table is compatible with accessories that have a standard US side-rail attachment.



ORDER: Sales@ImageDiagnostics.com SUPPORT: TechSupport@ImageDiagnostics.com WEBSITE: ImageDiagnostics.com

+1-978-829-0009 Monday through Friday 8am to 5pm, Eastern









Some accessories shown are optional



INTELLIGENT DESIGN ▶ TANGIBLE OUTCOMES



Key Features


The 100UC+ mobile urology table combines the benefits of fixed tables with improved accessibility for larger patients and advanced imaging capabilities, making it a versatile solution for urological procedures.

- Mobile Platform: Provides the functionality of a fixed table with portability
- Enhanced Patient Capacity: 550 pounds (250 kg)
- Ample C-Arm access
- Tabletop width: 28 inches (71 cm)
- Extensive imaging area allows for comprehensive anatomical visualization




Clinical Versatility and Mulitipurpose use

Urological accessories are easily removable so the table can be quickly configured for multi-purpose C-arm imaging or general patient positioning for non-urological procedures.

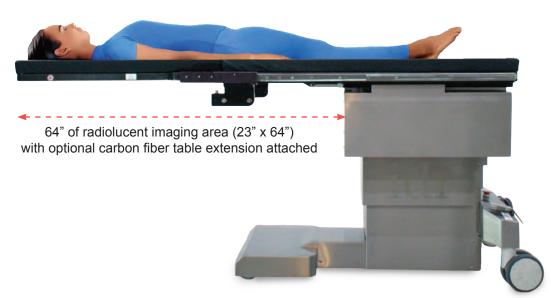

Shown with optional 24" x 34" carbon fiber imaging extension: 350 lb. (159 kg) patient weight capacity with patient upper body on optional carbon fiber extension

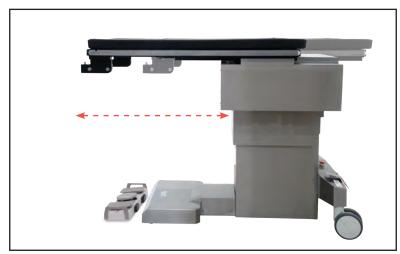

Longitudinal tabletop travel: 13.75" (35 cm) 9 inch (22.8cm) longer imaging area than before. Adds 3.75" (9.5cm) of longitudinal travel.



Clutter-free footswitch placement
The new table design allows ample room for

clutter-free placement of table and fluoro footswitches.



Increased Weight Capacity 550 pounds (249 kg)

100UC+ Improvements



Wireless table controls

Bluetooth hand pendant and foot switch controls
offering physicians more flexibility in table operation.



Higher and lower table heightsElevation Low:29.25" High 41" (74cm – 104cm)



Easy-to-clean stainless covers
Resistant to rust and corrosion, the non-porous surface prevents bacterial growth.



Simplified Setup

The stirrups and leg board extension can be mounted

at the same time, streamlining patient loading.



Programmable tabletop position
Save a preferred tabletop position using the "position save" button on the pendant hand control.



Thick tabletop padding for patient comfort
A 2-inch thick, waterproof pad designed to enhance
patient comfort, hygiene and durability.